

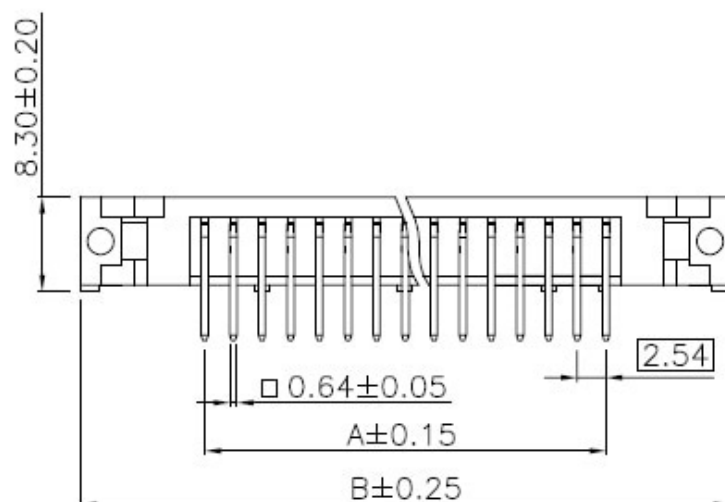
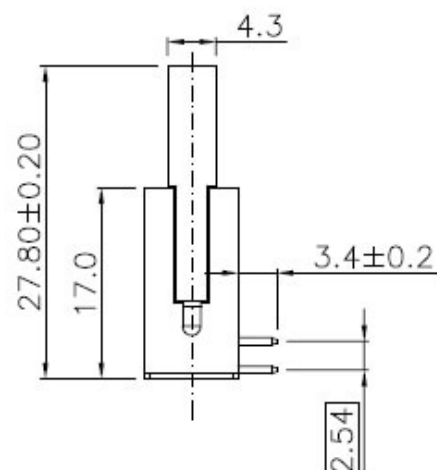


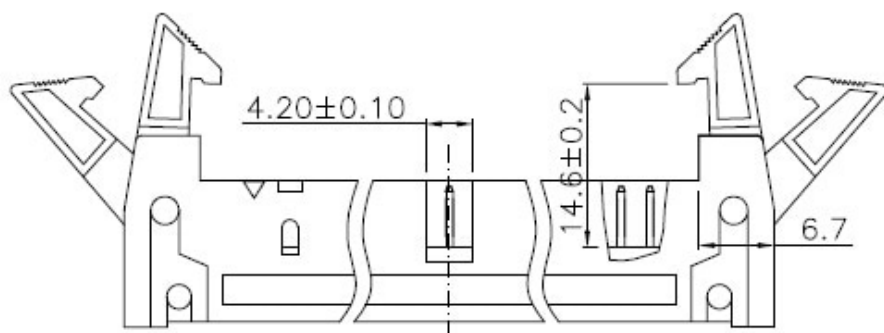

PIN数	尺寸A±0.1	尺寸B±0.20
10	10.16	32
14	15.24	37.08
16	17.78	39.6
20	22.86	44.7
26	30.48	52.3
30	35.56	57.4
34	40.64	62.5
40	48.26	70.1
50	60.96	82.85
60	73.66	95.40
64	78.74	100.48

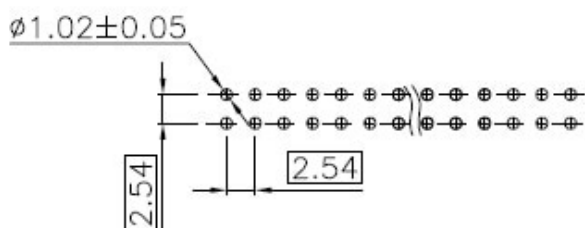

PCB LAYOUT

NOTES:

1.MATERIAL:

Insulator:PBT+30%GF,UL94V-0.

Contact:Brass.

PLATING:

Contact Area:GOLD PLATING OVER NICKEL

Other Area:GOLD or Sn Plating over Nickel.

2.ELECTRICAL

VOLTAGE RATING:250V AC/DC.

CONTACT CURRENT RATING:3 AMP PER PIN.

CONTACT RESISTANCE:30m OMG MAXIMAL PER PIN.

INSULATION RESISTANCE:1000 Megohms MINIMUM.

DIELECTRIC WITHSTANDING VOLTAGE:1000 V r.m.s.

3. ENVIRONMENTAL

TEMPERATURE TANGE: -40° C TO + 105° C.