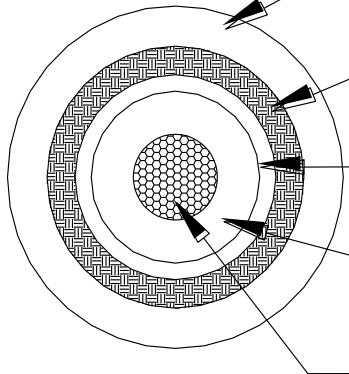


SPECIFICATION

DESCRIPTION		RG58U COAXIAL CABLE OD:5.0mm Matte/Black		CUT OF WIRE				
CONSTRUCTION		(20AWG×1C+AL+B)×1C		 JACKET BRAID SHIELD AL/MYLAR INSULATION CONDUCTOR				
GUAGE		(1/0.8×1C+AL+32#/0.12BC)×1C						
CONDUCTOR	Spec	1/0.8BC±0.008						
	Material	Bare copper						
INSULATION	Material	PE						
	Outside Diameter	3.0±0.05mm						
	Color	transparent						
	Thickness	1.1mm						
DRAIN WIRE (地线)	Material	N/A						
	Spec	N/A						
AL/MYLAR	Coverate	100%		NOTES（注释）：				
	Overlap	25%		A, RATING TEMPRATURE:60℃;RATING VOLTAGE:30V.				
	Color	silvery		B, INSULATION DC RESISTANCE:100M OHMS/KM MIN.				
BRAID SHIELD	Braid Shield	16*2/0.12BC±0.008		C, DIELECTRIC STRENGTH:500AC/1MIN;NO BREAKDOWN.				
	Material	Bare copper		D, Environmental protection requirements: This product meets RoHS Reach environmental protection standards.				
JACKET	Materal	PVC						
	Outside Diameter	5.0±0.15mm						
	Color	Black						
MARKING	Content	RG-58/U COAXIAL CABLE		Drafting	Examine	Drawing No	Product No	Customer confirmation
	Color	White						
				周海霞	陈从中	HT-060		